



LAY LENGTH

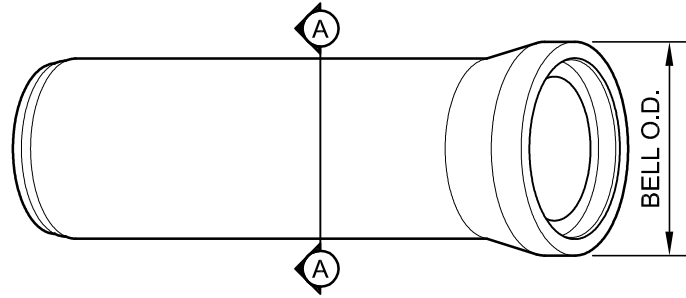

BELL O.D.


ISOMETRIC VIEW

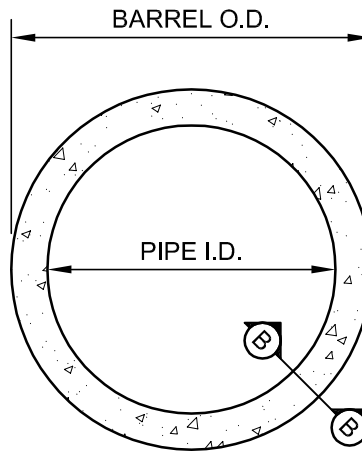

BARREL O.D.

PIPE I.D.

SECTION A-A

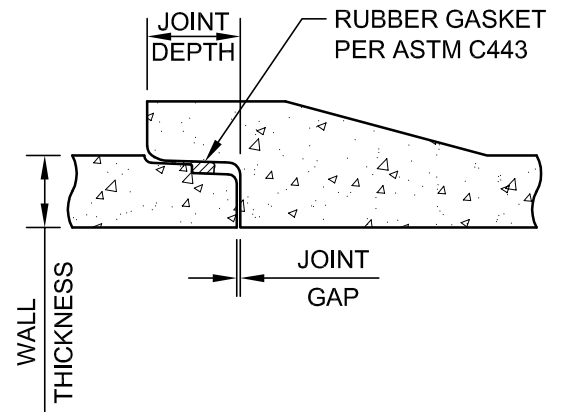


SECTION B-B
RCP JOINT DETAIL


REINFORCED PIPE SPECIFICATIONS

PIPE I.D. (Nominal)	WALL THICKNESS	RCP CLASS	BARREL O.D.	BELL O.D.	JOINT DEPTH	CORED HOLE	WEIGHT PER PIECE
12"	2¼" (B)	V	16½"	20"	3½"	20"	960 lb
15"	2¼" (B)	V	19½"	23⅞"	3½"	22"	1080 lb
18"	2½" (B)	III,IV,V	23"	27⅝"	3¾"	26"	1552 lb
21"	3" (B)	III,IV,V	27"	31¾"	3¾"	30"	1920 lb
24"	3" (B)	III,IV,V	30"	35⅝"	3⅞"	32"	2336 lb
27"	4" (C)	III,IV,V	35"	38"	4"	39"	2842 lb
30"	3⅞" (B)	III,IV,V	37¾"	41¼"	5¼"	41"	3625 lb
30"	4¼" (C)	III,IV,V	38½"	41¼"	5¼"	41"	3940 lb
36"	4¾" (C)	III,IV,V	45½"	49½"	5⅝"	48"	4872 lb
42"	4¾" (B)	II,III,IV,V	51½"	55⅝"	5½"	54"	6480 lb
48"	5¾" (C)	II,III,IV,V	59½"	66¼"	4¾"	62"	7912 lb


NOTES:

1. CONFORMS TO CURRENT ASTM C76 REQUIREMENTS.
2. CUSTOM PIPE FITTINGS ALSO AVAILABLE.
3. MANUFACTURED USING TYPE III/V CEMENT WHICH MEETS THE REQUIREMENTS FOR BOTH TYPE III AND TYPE V CEMENT.
4. LAY LENGTH FOR ALL SIZES = 8.00'
AVERAGE JOINT GAP = 0.04' (½")


 GENEVA PIPE <small>Concrete products. concrete reliability</small>	SHEET: 12"-48" REINFORCED CONCRETE PIPE		
	SCALE:	N.T.S.	DRAWN: RMP
	DATE:	3-1-2013	PROJECT #:
PROJECT: STANDARD DRAWING			
LOCATION: SALT LAKE - OREM - ST. GEORGE			1 of 1

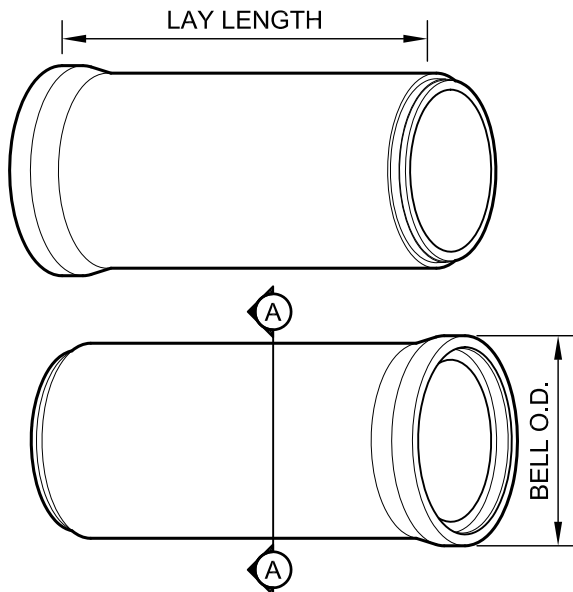

ISOMETRIC VIEW

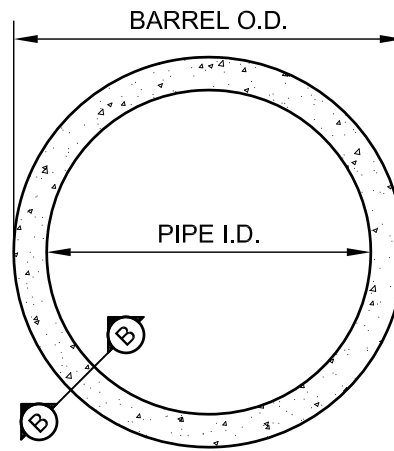

SECTION A-A

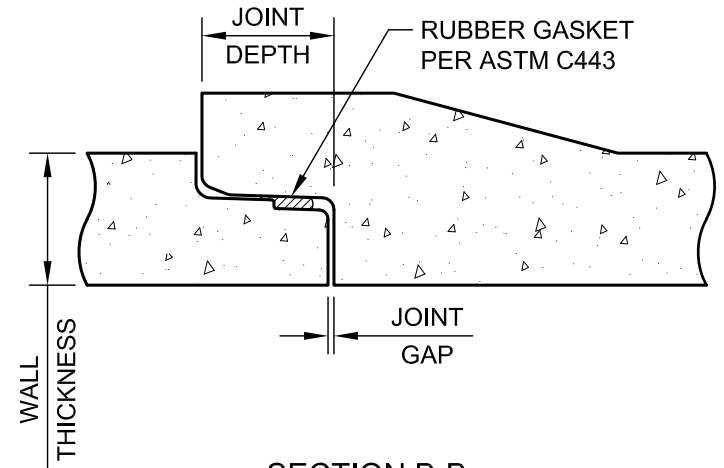


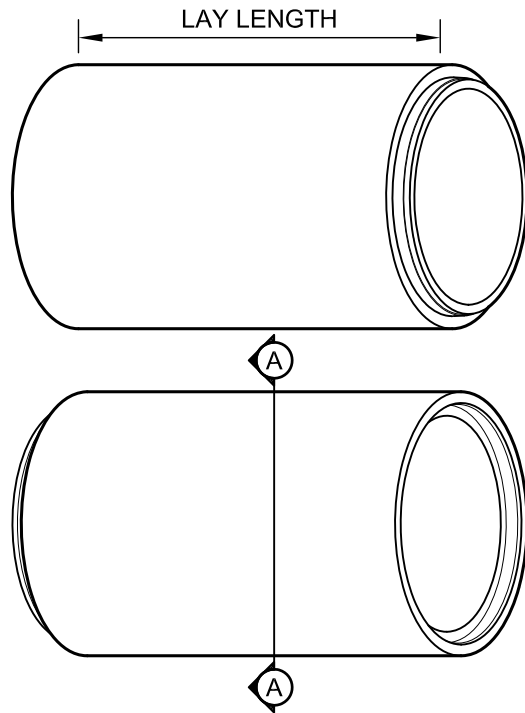
SECTION B-B
RCP JOINT DETAIL

REINFORCED PIPE SPECIFICATIONS							
PIPE I.D.	WALL THICKNESS	RCP CLASS	BARREL O.D.	BELL O.D.	JOINT DEPTH	CORED HOLE	WEIGHT EA PIECE
42"	5¼" (C)	II,III,IV,V	52½"	57"	5½"	55"	9,720 lb
48"	5¾" (C)	II,III,IV,V	59½"	61⅞"	4¼"	62"	11,868 lb
54"	5½" (B)	II,III,IV,V	65"	70"	5½"	70"	13,404 lb
60"	6" (B)	II,III,IV	72"	76½"	5½"	76"	18,384 lb
66"	7¼" (C)	II,III,IV,V	80½"	84"	6¼"	86"	21,600 lb
72"	7" (B)	II,III,IV	86"	88"	5½"	90"	22,104 lb


NOTES:

1. CONFORMS TO CURRENT ASTM C76 REQUIREMENTS.
2. CUSTOM PIPE FITTINGS ALSO AVAILABLE.
3. MANUFACTURED USING TYPE III/IV CEMENT WHICH MEETS THE REQUIREMENTS FOR BOTH TYPE III AND TYPE V CEMENT.
4. LAY LENGTH FOR ALL SIZES = 12.00'
AVERAGE JOINT GAP = 0.04' (½")


 GENEVA PIPE <small>Concrete products. concrete reliability</small>	SHEET: 42"-72" REINFORCED CONCRETE PIPE		
	SCALE: N.T.S.	DRAWN: RMP	
	DATE: 3-1-2013	PROJECT #:	-
PROJECT: STANDARD DRAWING			
LOCATION: SALT LAKE - OREM - ST. GEORGE			1 of 1



ISOMETRIC VIEW

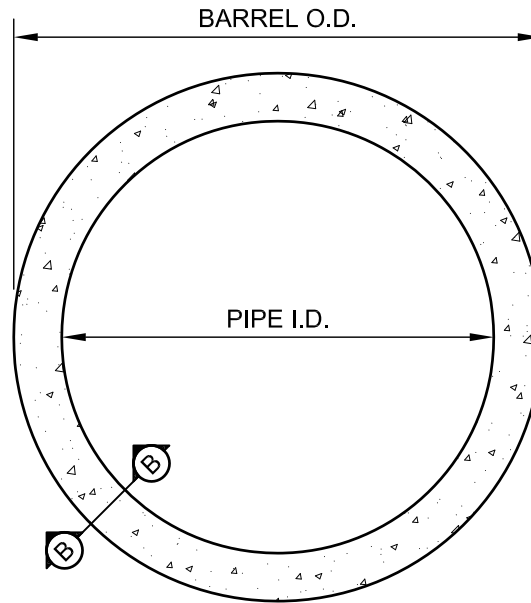

SECTION A-A

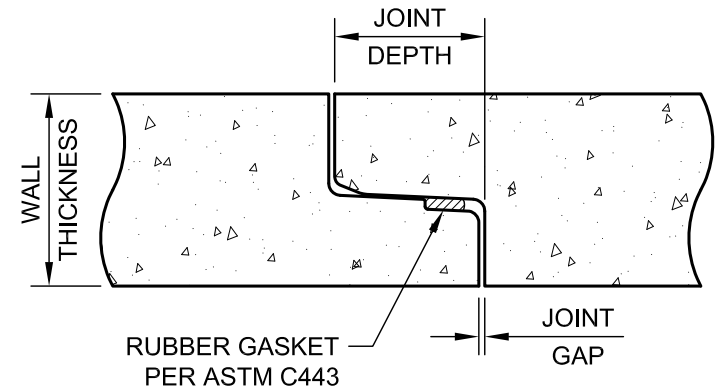


SECTION B-B
RCP JOINT DETAIL

NOTES:

1. CONFORMS TO CURRENT ASTM C76 REQUIREMENTS.
2. CUSTOM PIPE FITTINGS ALSO AVAILABLE.
3. MANUFACTURED USING TYPE III/V CEMENT WHICH MEETS THE REQUIREMENTS FOR BOTH TYPE III AND TYPE V CEMENT.
4. LAY LENGTH FOR ALL SIZES = 12.00' AVERAGE JOINT GAP = 0.04' (1/2")

REINFORCED PIPE SPECIFICATIONS						
PIPE I.D.	WALL THICKNESS	RCP CLASS	BARREL O.D.	JOINT DEPTH	CORED HOLE	WEIGHT EA PIECE
72"	8" (C)	IV,V	88"	5 1/2"	91"	24,300 lb
84"	8 3/4" (C)	II,III,IV	101 1/2"	6 3/8"	106"	31,800 lb
96"	9 3/4" (C)	II,III	115 1/2"	6 5/8"	120"	40,500 lb

* ADDITIONAL RCP CLASSES AVAILABLE UPON REQUEST
8.00' LAY LENGTH AVAILABLE FOR SELECT SIZES
CONTACT US FOR PIPE SIZES GREATER THAN SHOWN

 GENEVA PIPE <small>Concrete products. concrete reliability</small>	SHEET: 72"-96" REINFORCED CONCRETE PIPE		
	SCALE:	N.T.S.	DRAWN: RMP
	DATE:	3-1-2013	PROJECT #:
PROJECT: STANDARD DRAWING			
LOCATION: SALT LAKE - OREM - ST. GEORGE			1 of 1